


# LAVA® FRAME

The infrared heater for wall and ceiling installation

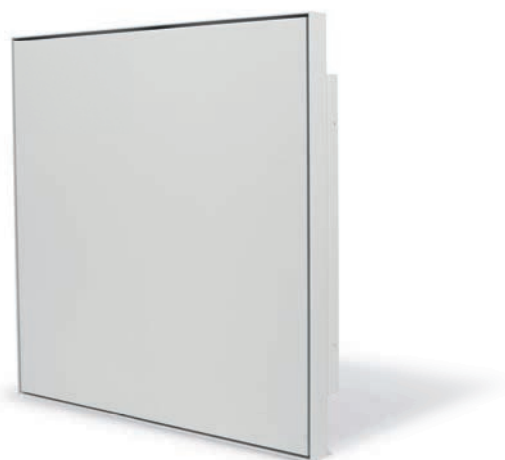

LAVA® FRAME is an infrared heater that can be flush-mounted in the ceiling and wall due to the installation frame, thus creating a harmonious room appearance. It is ideally suited for installation in dry construction and concrete. This means that the LAVA® infrared heater blends even better into the architecture of the room and becomes virtually invisible.

Suitable as full area heating or also for particular heating zones. This not only saves heating costs, but also ensures a pleasant, healthy indoor climate.

**NOTE**

The LAVA® FRAME comes without plug and without plug & play connection.

**TECHNICAL DETAILS**

- > Voltage: 230 V
- > Output: 350, 500, 740, 750 W
- > Surface temperature: max. 120 °C at standard internal temp.
- > Surface: Structured surfaces
- > Frame: Steel housing, white RAL 9016
- > Device depth: 22 mm
- > Depth: 75 mm
- > IP rating: IP 21
- > Connection cable (no plug): 1 m, 3 x 1.5 mm<sup>2</sup> without plug
- > Warranty: 5 years

**BENEFITS OF THIS PRODUCT**

- + Suitable for wall and ceiling installation
- + Mounting frame with Easy-Click
- + Flush-mounted installation
- + Simple installation
- + Large infrared radiation surface
- + High radiant heating effect
- + Maintenance-free and without magnetic field

**SELECTION GUIDE**

The selection of the output depends on the heat demand in the room (height: 2.5 m) and the use of the heater. The following is a guide:

- 20-45 W/m<sup>2</sup> Low energy and passive house
- 50-70 W/m<sup>2</sup> Well insulated living space
- 75-95 W/m<sup>2</sup> Moderately insulated living space
- 100-120 W/m<sup>2</sup> Poorly insulated living space

**LAVA® FRAME built-in infrared heater including mounting frame, RAL 9016 traffic white**

PG: I2 | DT: ex stock

Type	Item no.	Output (W)	Installation dimension (mm)	Dimensions without frame (mm)		Weight without frame (kg)
				Length	Width	
LAVA-FRAME-350	40505	350	635 x 635 x 75	620	620	7.5
LAVA-FRAME-500	40506	500	635 x 915 x 75	900	620	12
LAVA-FRAME-740	44719	700	915 x 915 x 75	900	900	17
LAVA-FRAME-750	40507	750	635 x 1260 x 75	1245	620	16

**Accessories**

PG: E1 | DT: ex stock

Type	Item no.	Description
eBASIC-1	41278	Switch-mounted thermostat with control dial and app function via Bluetooth 4.2, 16 A, 5-28 °C, white
eTOUCH-PRO-1-W	41236	Smart thermostat with Wi-Fi and app control, 5-40 °C, 16 A, white
ET-14A	40595	Radio room thermostat, LCD display with clock and week program
ET-111A	36758	Radio receiver with a 16 A relay in wall-mounted housing

**ETHERMA HINT:** Plan your infrared heating using the ETHERMA ePLANNER here: [www.etherma.com/eplanner](http://www.etherma.com/eplanner).