

NEW

CE

TECHNICAL DATA

- > Voltage: 230 V
- > Fuse protection: 16 A
- > Output: 600, 800, 1500 W
- > Surface temp.: approx. 180°C at standard indoor temperature
- > Surface: Safety glass satin matt
- > Color: White
- > Device/mounting depth: 25/55 mm
- > Mounting heights: 1,85 m to max. 4 m
- > IP rating: IP 24
- > Connection cable: 1 m, 3 x 1,0 mm² without plug
- > Warranty: 5 years

SELECTION HELP

The selection of the power depends on the heat demand of the room (H: 2.5 m) and the application of the heater.

AS A GUIDELINE

- 20-45 W/m² Low energy and passive house
- 50-70 W/m² Well insulated living space
- 75-95 W/m² Mediocre insulated living space
- 100-120 W/m² Poorly insulated housing

LAVA® MAXIMUS

The infrared heating panel with extra strong performance


**LAVA® MAXIMUS infrared heating panel, glass satin, pure white (PW)**

PG: I4 | DT: ex stock


Type	Item no.	Output (W)	Length (mm)	Hight (mm)	Weight (kg)
LAVA-MAX-GL-600-PW	46180	600	480	480	5
LAVA-MAX-GL-800-PW	46181	800	620	620	7,5
LAVA-MAX-GL-1500-PW	46182	1500	1245	620	15
LAVA-MAX-GL-800EP-PW	46183	800	595	595	7,2
LAVA-MAX-GL-1500EP-PW	46184	1500	1195	595	14,4



Rear view 800 W

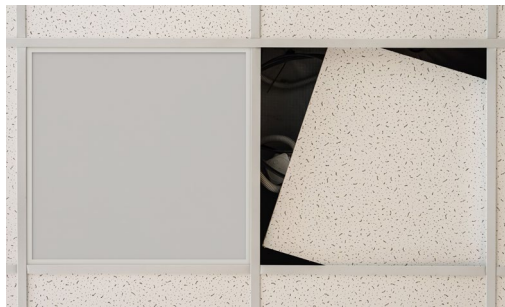

Grid ceiling

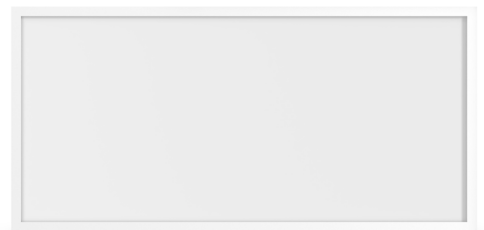

Front view 1500 W

Accessories

PG: E1 | DT: ex stock

Type	Item no.	Description
eBASIC-1	41278	Switch-mounted thermostat with control dial and app function via Bluetooth 4.2, 16 A, 5-28 °C, white 134.50
eTOUCH-PRO-1-W	41236	Smart thermostat with Wi-Fi and app control, 5-40 °C, 16 A, white
ET-14A	40595	Radio room thermostat, LCD display with clock and weekly program
ET-111C	40039	Radio receiver with 10 A relay in flush-mounted box